



# 5MP – Vandal Dome IR camera - WDR

\* Motorized Zoom, Focus and P-iris Lens 3 -10mm / ø5 IR LEDs\*18pcs / Day & Night

## G4S-5894i




### GENERAL FEATURES

- SONY Sensor IMX-178
- Triple Stream(H.264 or H.265 x2 + JPEG x 1)
- Tamper Detection
- Multi Language GUI support
- ONVIF Profile S Compliant
- Triple Power. DC12V, 24VAC, PoE(802.3af)
- SDHC memory card (card not included)
- DPC(Defective Pixel Correction) on the fly
- Heater & Fan
- Analog Output (Installation Only)

### SPECIFICATIONS

Image Sensor	Sony IMX-178
Max. Resolution	2592x1944 (5M)
White Balance	ATW / MANUAL(PRESET)
Electronic Zoom	2 ~ 10x(Client Software)
WDR	Yes(True WDR) / Dynamic Range: TBD
AGC	Yes
BLC	Yes
E-Shutter Speed	1/4~1/2000
Slow Shutter	Off, x2, 4x, 8x
Lens	TAMRON Motorized with p-iris f=3~10mm, F1.4
Angle of View (H/V/D)	81.4/59.8/91.9 (wide) - 36.5/27/44.4 (tele)
AUDIO In/Out CODEC	Line in/out - G.711
Network	10BASE-T, 100BASE-TX, RJ45
Resolution	2592x1944(5M), 2304x1296(3M), 2048x1536(3M), 1920x1080(Full HD), 1280x1024(SXGA), 1024x768(XGA), 1280x720(720p), 640x480(VGA), 640x360, 320x240(QVGA) 704x480/576(4CIF), 352x240/288(CIF)
Protocol	IPv4, HTTP, HTTPS(@Ver2.0), SMTP, UPnP, DNS, SSL, RTSP, DDNS, RTP, TCP, UDP, RTCP, DHCP, ARP, IGMP, ICMP, NTP, SNMP
Frame Rate	1 fps ~ 25 fps / 1 fps ~ 30 fps
Web Browser	Internet Explorer 8 or up, Firefox, Chrome, PDA ,Smart phone
Video Motion Detection	User set 4 ROI(Region Of Interest) 10 Step Sensitivity
Privacy Mask	Yes (2)
Power Source	DC12V-940mA , 24VAC-1100mA PoE -11W(IEEE 802.3af compliant)
External I/O	Alarm In x1, Alarm Out x1, Audio In x1, Audio Out x1
Ambient Temperature	-10°C ~ 50°C With Heater -30°C ~ 50°C
Humidity	less than 90%, Non-condensing
Materials	Aluminum Diecasting
IP Rating	IP66 / IK10
Weight / Dimensions	1140g / 142(H) x Ø135 mm / Ø84mm Dome

### DIMENSIONS

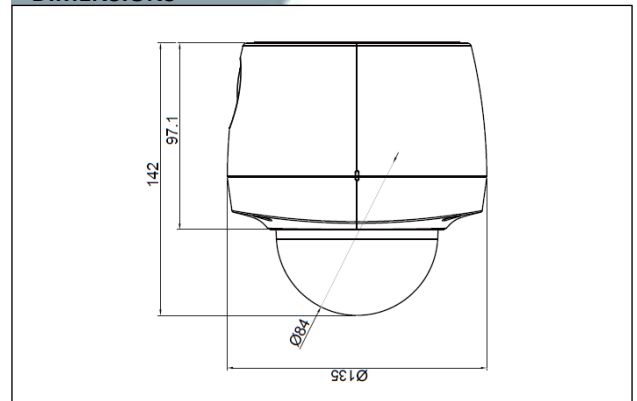

### ADDRESS

**ITX Security co., LTD.**  
**505-14, Kolon Digital Tower Aston Bldg #904**  
**Gasan-Dong, Geumcheon-Gu,**  
**SEOUL, 153-803, KOREA**